

SURFACE ULTRA-THIN LIGHT



SURFACE ULTRA THIN LIGHTS



NO CEILING



WITHOUT SLOT



INFINITE SPLICE
LENGTH

Track Thickness 0.5CM




Track Thickness 0.5CM

ULTRA THIN MAGNET LIGHT SYSTEM

Built-in power supply




Double Magnet
No Snap Design
Freedom of movement

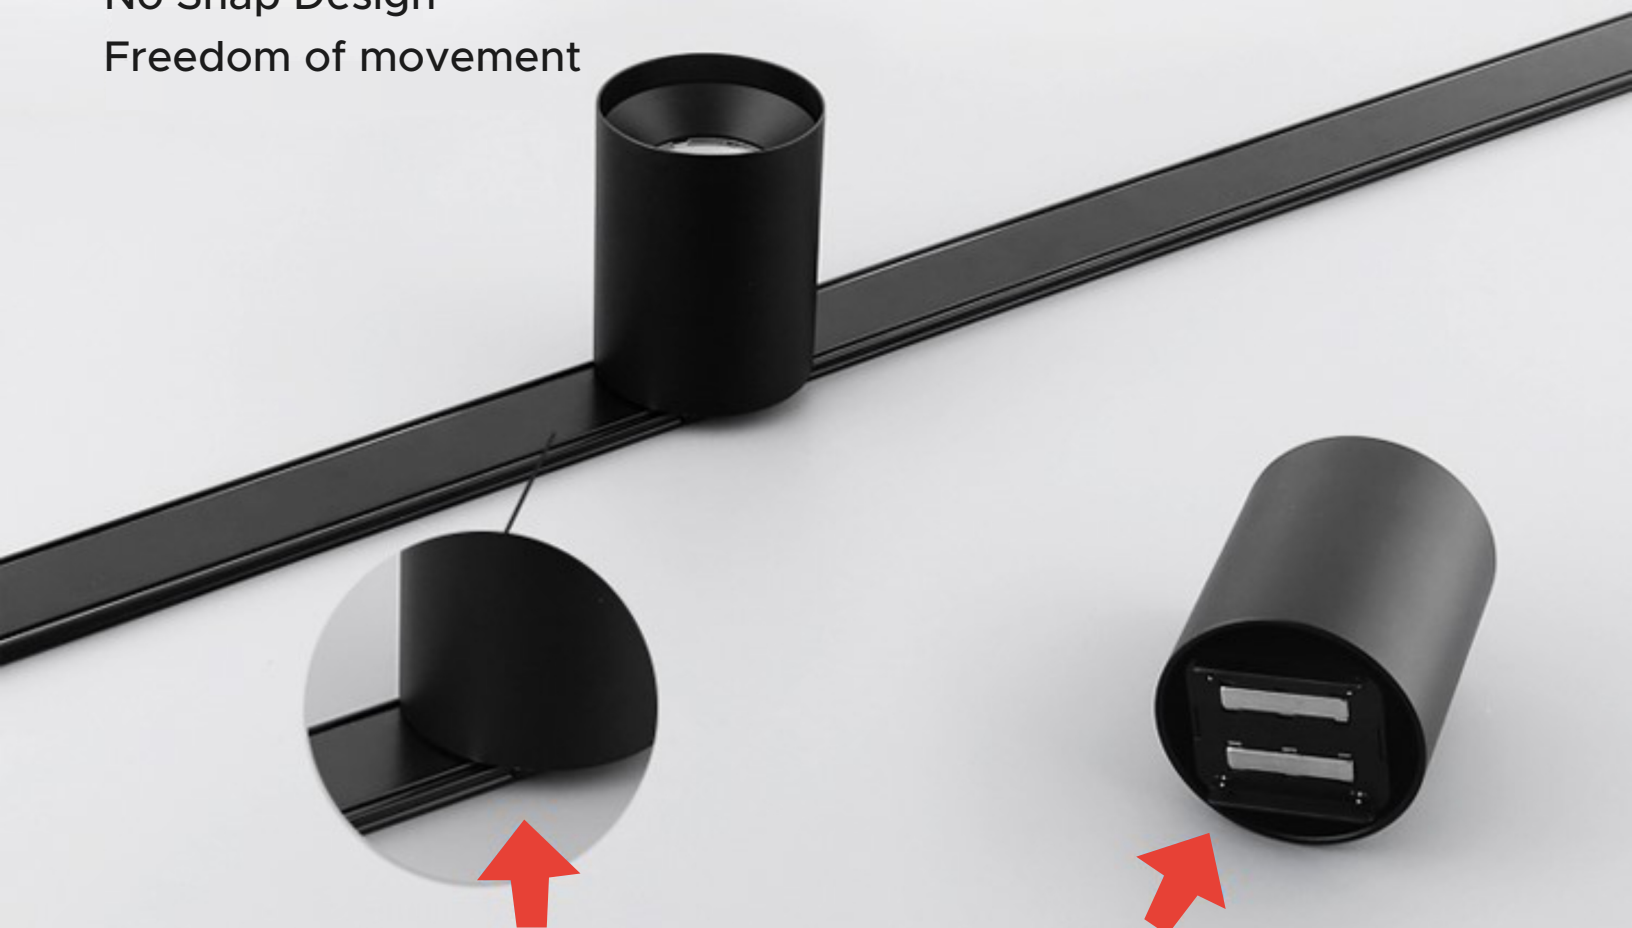

Fits The Track Perfectly

Power Supply And Lighting
Integration

MOVE AS YOU WISH

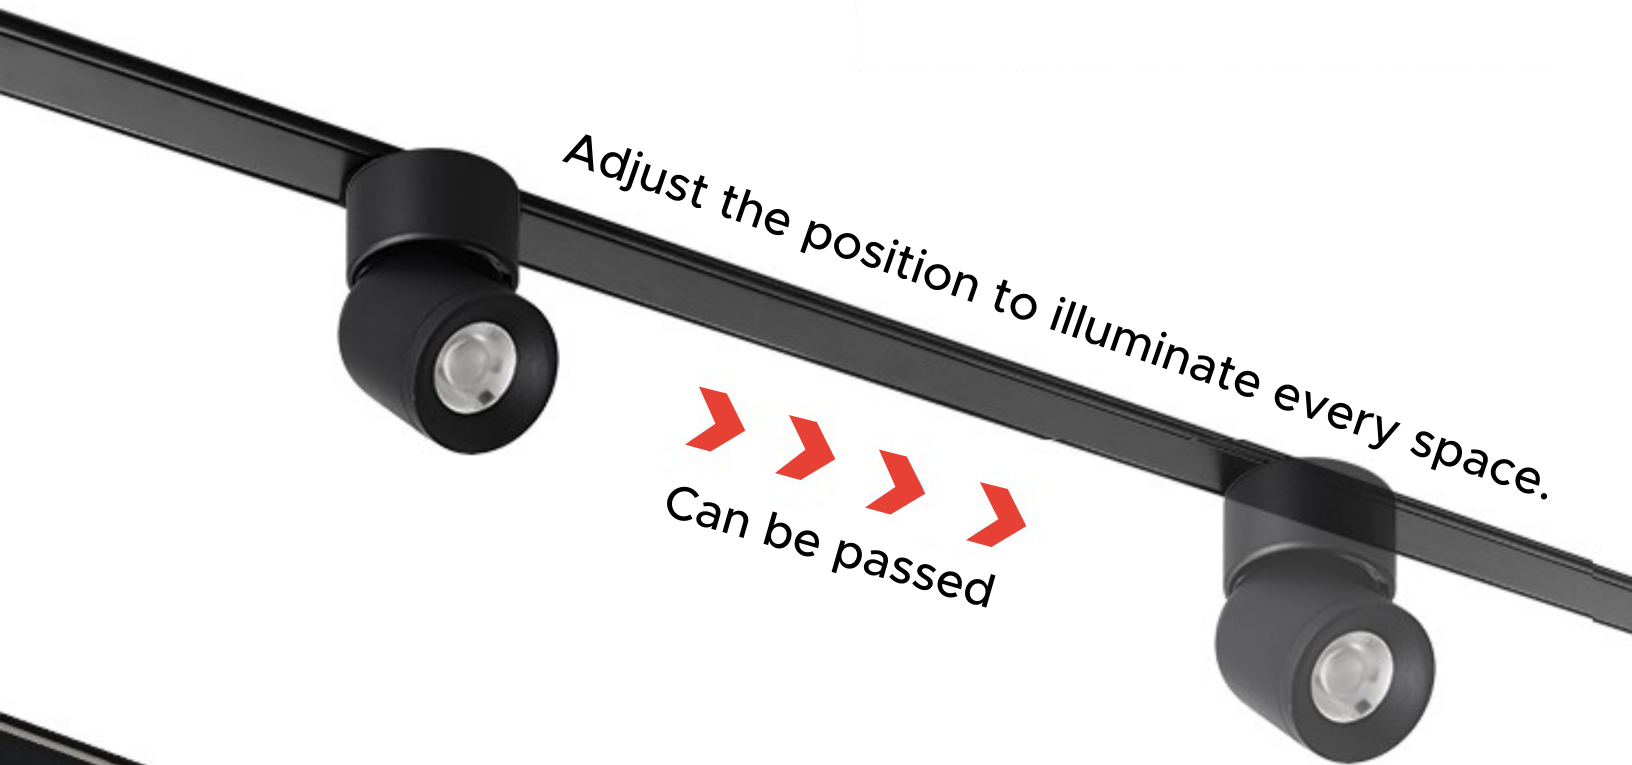

Adjust the position to illuminate every space.

Can be passed



48V safe voltage no risk to touch

SURFACE ULTRA THIN LIGHTS



Safe Voltage



Strong Magnetic
Sucker




Move As You Wish

CANQUA


lighting revolution

The ultrathin channel of the track provides a sleek, modern look that seamlessly integrates into any space, offering a clean and unobtrusive design. The ultrathin design of the track minimizes visual clutter and takes up less physical space, making it an ideal solution for rooms with limited ceiling height or where space is at a premium. Ultrathin tracks can be discreetly integrated into architectural features, providing seamless and unobtrusive lighting solutions that enhance the overall design of a space.


INSTALLATION GUIDE



1. The fixed bracket is fixed with screws to fit the mounting surface.

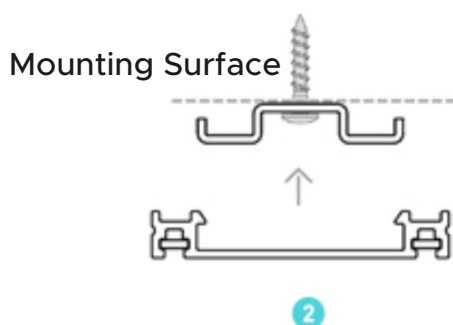

2. Cover the decorative surface of the track on the fixed bracket of the mounting surface.

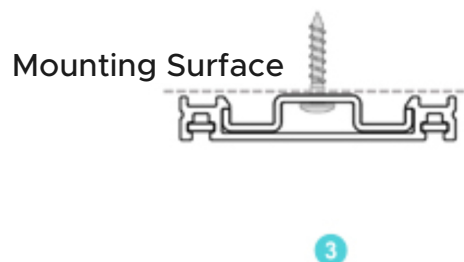

3. The decorative surface of the track is close to the fixed bracket fitting and fixing, that is, to complete the installation.



SURFACE ULTRA THIN LIGHTS

VERTICAL RIGHT ANGLE SPLICER

The ceiling can be seamlessly joined with the wall.



STRAIGHT LINE SPLICER

Make the track horizontal and seamless.



BUILT-IN WIRING MODULE

Equipped with a cable box, the power cables are not exposed. Not only beautiful dust proof more safe and reliable.



The power cable connection module is safe and convenient.

SURFACE ULTRATHIN MAGNETIC LIGHTS

MS30-TL7



MS30-DR54



MS30-SA1



MS30-SP1



MS30-DR54R





MS30-LB24



MS30-DF300



BUILD A CHIC AND COMFORTABLE SPACE WITH OUR SURFACE ULTRA THIN LIGHT RANGE.

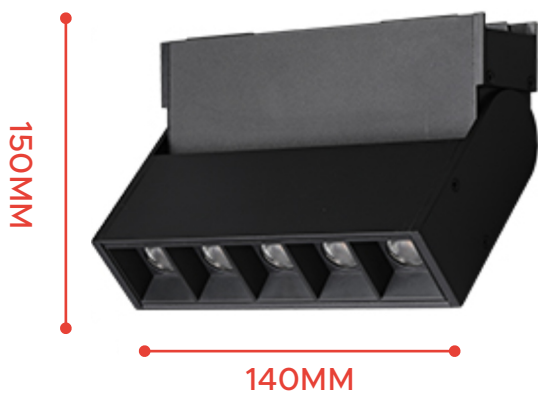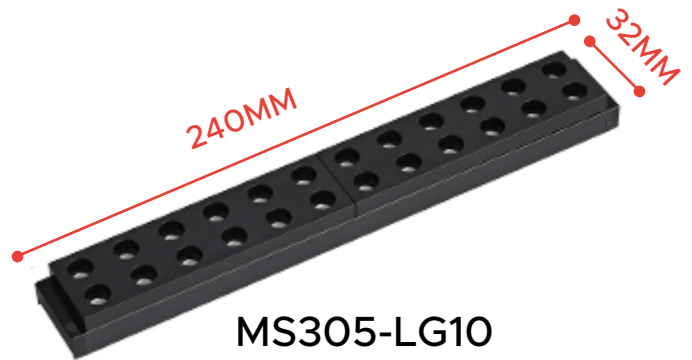

PRODUCT NAME	BEAM ANGLE	DIMENSIONS	WATT	CCT
MS305-DF12	105°	Φ 300X32X11MM	12W	1800K - 6500K
MS305-LG10	30°	Φ 140X30X105MM	10W	1800K - 6500K
MS305-LSA10	30°	Φ 140X30X105MM	10W	1800K - 6500K
MS305-TL07	24°	Φ 30X145MM	7W	1800K - 6500K

SURFACE ULTRA THIN LIGHTS



PRODUCT NAME	BEAM ANGLE	DIMENSIONS	WATT	CCT
MS30-DR54	24°	Φ 54X75MM	7W	1800K - 6500K
MS30-DR54R	24°	Φ 54X63X98MM	6W	1800K - 6500K



PRODUCT NAME	BEAM ANGLE	DIMENSIONS	WATT	CCT
MS30-SP1	30°	Φ 54X75MM	5W	1800K - 6500K
MS30-SA1	160°	Φ 55X55X75MM	4W	1800K - 6500K


SURFACE ULTRA-THIN LIGHTS ACCESSORIES:




MS30




MS30-SP200 POWER
SUPPLY

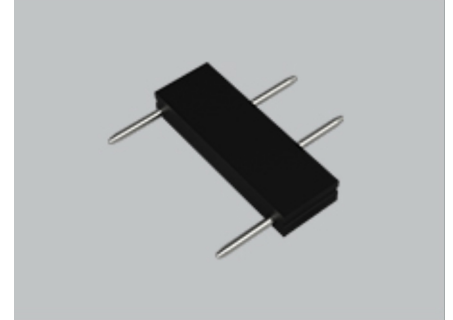


LT CROSS MODULE
BODY PINK

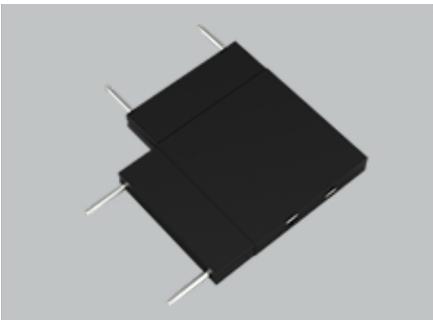


MS30L TYPE MODULE

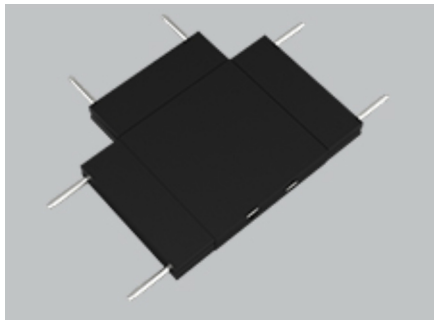


MS30T TYPE MODULE

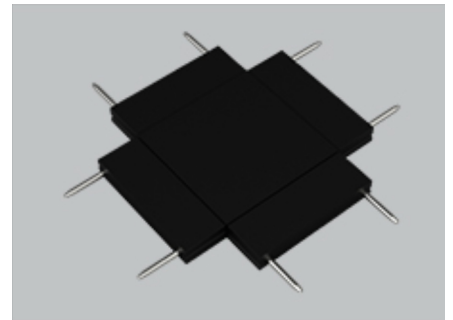


MS30 CROSS MODULE

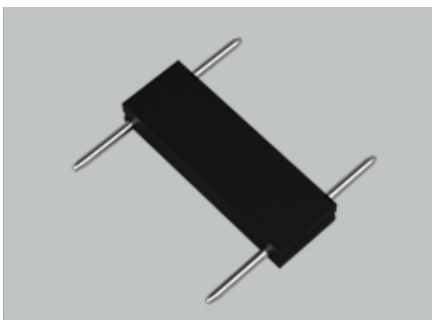

MS30 PASS THROUGH
MODULE

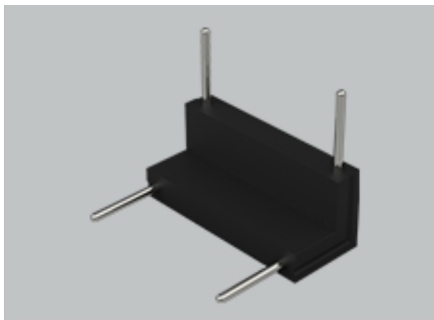

MS30 90° MODULE

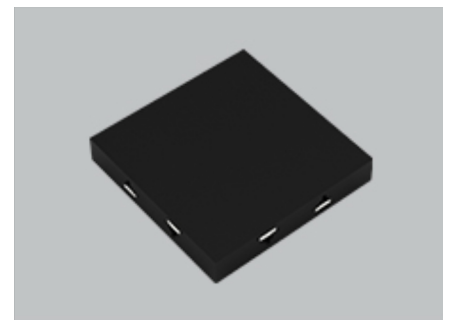

LT CROSS MODULE
BODY